


Fence with 2x2 pre-installed posts is not allowed

SECTION A-A

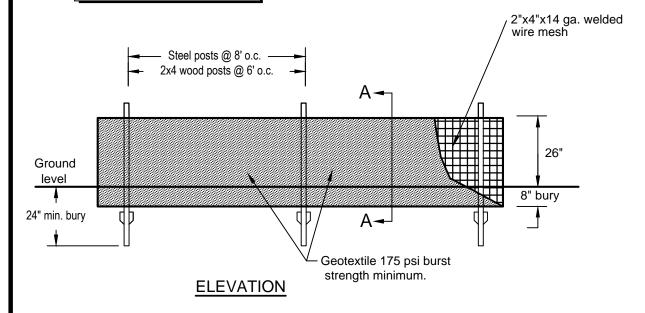

SILT FENCE NOTES:

- 1. Attach wire mesh to posts with approved metal devices.
- 2. Attach geotextile fabric to the up-slope side of the posts and wire mesh top and bottom with approved metal fasteners @ 24" o.c. maximum spacing.
- 4. Geotextile fabric top edge shall be 26" minimum above ground.
- 5. Overlap vertical silt fence splices 8' minimum (post to post). See elevation, above. Avoid sumps and other low points.

P:\Engr & CAD\STANDARD DWGS - ALL YEARS\Std Dwgs 2014\Silt Fence 29.dwg

2011 drr

SILT FENCE

29

ADOPTED: 12-09-2014

PAGE NO:

CITY OF PULLMAN ENGINEERING DIVISION